




Cordova Bolt, Inc.

Hex Coupling Nut Product Information

1.0 Dimensions: As per ASME B18.2.2

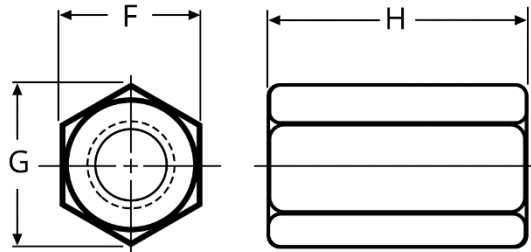

| Nominal Size or Basic Major Diameter of Thread | F | | G | | H | |
|--|--------------------|-------|----------------------|-------|--------|-------|
| | Width Across Flats | | Width Across Corners | | Length | |
| | Max | Min | Max | Min | Max | Min |
| #6 | 0.312 | 0.302 | 0.361 | 0.344 | 0.510 | 0.470 |
| #8 | 0.312 | 0.302 | 0.361 | 0.344 | 0.645 | 0.595 |
| #10 | 0.312 | 0.302 | 0.361 | 0.344 | 0.760 | 0.711 |
| 1/4 | 0.438 | 0.428 | 0.505 | 0.488 | 1.760 | 1.690 |
| 5/16 | 0.500 | 0.489 | 0.557 | 0.557 | 1.760 | 1.690 |
| 3/8 | 0.562 | 0.551 | 0.650 | 0.628 | 1.760 | 1.690 |
| 7/16 | 0.625 | 0.607 | 0.722 | 0.692 | 1.760 | 1.690 |
| 1/2 | 0.688 | 0.663 | 0.794 | 0.756 | 1.760 | 1.690 |
| 9/16 | 0.813 | 0.782 | 0.939 | 0.891 | 2.135 | 2.067 |
| 5/8 | 0.813 | 0.782 | 0.939 | 0.891 | 2.135 | 2.067 |
| 3/4 | 1.000 | 0.963 | 1.155 | 1.097 | 2.260 | 2.190 |
| 7/8 | 1.250 | 1.212 | 1.443 | 1.382 | 2.510 | 2.440 |
| 1 | 1.375 | 1.325 | 1.588 | 1.511 | 2.760 | 2.690 |
| 1-1/8 | 1.500 | 1.450 | 1.732 | 1.653 | 3.010 | 2.940 |
| 1-1/4 | 1.625 | 1.575 | 1.876 | 1.825 | 3.010 | 2.940 |
| 1-1/2 | 2.000 | 1.950 | 2.309 | 2.275 | 3.510 | 3.440 |
| 1-5/8 | 2.562 | 2.481 | 2.959 | 2.828 | 4.910 | 4.830 |
| 1-3/4 | 2.750 | 2.662 | 3.175 | 3.035 | 5.290 | 5.210 |
| 1-7/8 | 2.938 | 2.844 | 3.392 | 3.242 | 5.670 | 5.580 |
| 2 | 3.125 | 3.025 | 3.608 | 3.448 | 6.040 | 5.950 |
| 2-1/4 | 3.500 | 3.388 | 4.041 | 3.862 | 6.800 | 6.700 |
| 2-1/2 | 3.875 | 3.750 | 4.474 | 4.275 | 7.550 | 7.440 |

Disclaimer: The presented data is based off various industry standards. Cordova Bolt, Inc. strives to present up to date, accurate data. However Cordova Bolt, Inc. cannot be held liable for any errors or discrepancies within the presented information



Cordova Bolt, Inc.

5601 Dolly Avenue Buena Park CA 90621
(714) 739-7500 - (714) 994-2661-fax
www.cordovabolt.com



Cordova Bolt, Inc.

| | | | | | | |
|--------------|-------|-------|--------|--------|--------|--------|
| 2-3/4 | 4.250 | 4.112 | 4.907 | 4.688 | 8.310 | 8.190 |
| 3 | 4.625 | 4.475 | 5.340 | 5.101 | 9.060 | 8.940 |
| 3-1/4 | 5.000 | 4.838 | 5.773 | 5.515 | 9.810 | 9.680 |
| 3-1/2 | 5.375 | 5.200 | 6.206 | 5.928 | 10.570 | 10.430 |
| 3-3/4 | 5.750 | 5.562 | 6.639 | 6.340 | 11.320 | 11.170 |
| 4 | 6.125 | 5.925 | 7.072 | 6.754 | 12.080 | 11.920 |
| 4-1/4 | 6.500 | 6.288 | 7.506 | 7.168 | 12.830 | 12.670 |
| 4-1/2 | 6.875 | 6.650 | 7.939 | 7.581 | 13.580 | 13.420 |
| 4-3/4 | 7.250 | 7.012 | 8.372 | 7.994 | 14.340 | 14.160 |
| 5 | 7.625 | 7.375 | 8.805 | 8.408 | 15.090 | 14.910 |
| 5-1/4 | 8.000 | 7.738 | 9.238 | 8.821 | 15.850 | 15.650 |
| 5-1/2 | 8.375 | 8.100 | 9.671 | 9.234 | 16.600 | 16.400 |
| 5-3/4 | 8.750 | 8.462 | 10.104 | 9.647 | 17.350 | 17.150 |
| 6 | 9.125 | 8.825 | 10.537 | 10.060 | 18.110 | 17.890 |

Disclaimer: The presented data is based off various industry standards. Cordova Bolt, Inc. strives to present up to date, accurate data. However Cordova Bolt, Inc. cannot be held liable for any errors or discrepancies within the presented information



Cordova Bolt, Inc.

5601 Dolly Avenue Buena Park CA 90621
(714) 739-7500 - (714) 994-2661-fax
www.cordovabolt.com